




Manufacturer	Phoenix Prime Focus, Australia		
Model No.	DK900JC		
Description	Round Duck Oven with Stone Hearth Floor		
Purpose	Oven used to cook Peking Duck, Char Sui Pork, other Meats and Dishes		
Fuel Options	Full Gas, Combination Gas & Wood		
Gas Requirements	70mJ (66,650 Btu) Thermostatically Controlled Infinity Gas Display Burner		
Exhaust Requirements	Under Canopy/Hood or Direct Connect via Phoenix Flue Transition with Particle Filter and fitted with Thermal Interlock Sensor, to a grease rated exhaust fitted with a suitable power fan (supplied by others) The exhaust is best in a dedicated system. It is critical that ductwork be installed in accordance with local regulations.		
External Dimensions	1250mm (Diameter) x 1888mm (H)	Oven Weight (Approx.) 1400kg	
Internal Dimensions	900mm Diameter		
MEP Ratings	Gas Connection: 19mm (3/4") Line Electrical (wall socket): 230-240V (Single Phase) 10amp	Exhaust Connection: 300mm x 300mm Universal Duct. 700L/s. 150 Pa	
Compliance	The oven and gas system are CE & AGA compliant		
Warranty	4 Year Structural Guarantee, 12 Months for Gas System & Components		
Safety Notes	The oven must be vented in accordance with local and/or national codes All gas systems fitted with flame failure, thermal interlock sensor and pressure differential switch for safety Oven facade/enclosure is to be constructed from non-combustible (fire-rated) materials Ventilated access panels required both above and below the oven (min. size 600mm x 600mm)		
Manufacturer Materials	High quality ceramic materials fully enclosed in a 5mm mild steel external shell. One piece cast ceramic ceiling. The cooking surface is constructed using high quality ceramic alumina bricks		

## STANDARD FEATURES & OPTIONS


- Thermostatically controlled gas system with easy to use compact digital temperature control panel, remote mount option available.
- Unique exhaust design with advanced safety features.
- Traditional style fire grate for oven mouth.
- Accessory Kit: removable SS drip tray, hooks and tool set.
- 1 Piece Stainless Steel Hearth and Lintel surround for oven mouth. Easy and safe integration with architectural facade.
- 2 Part assembly for easy installation. All ovens can be designed for transport through doorways, lifts & staircases.
   (Please advise prior to order as alteration may be required)
- Internal Spotlight included as a standard feature.
- Flue transition with flame resistant particle filter.
- Optional extras available: viewing window.
- · Various facades and external cladding options.

Approx. 6 DUCK CAPACITY

Cooking Time 50 - 60 mins (based on oven operating at 325° C)



Sample image only, details and finishes may vary. Refer to technical drawing over.

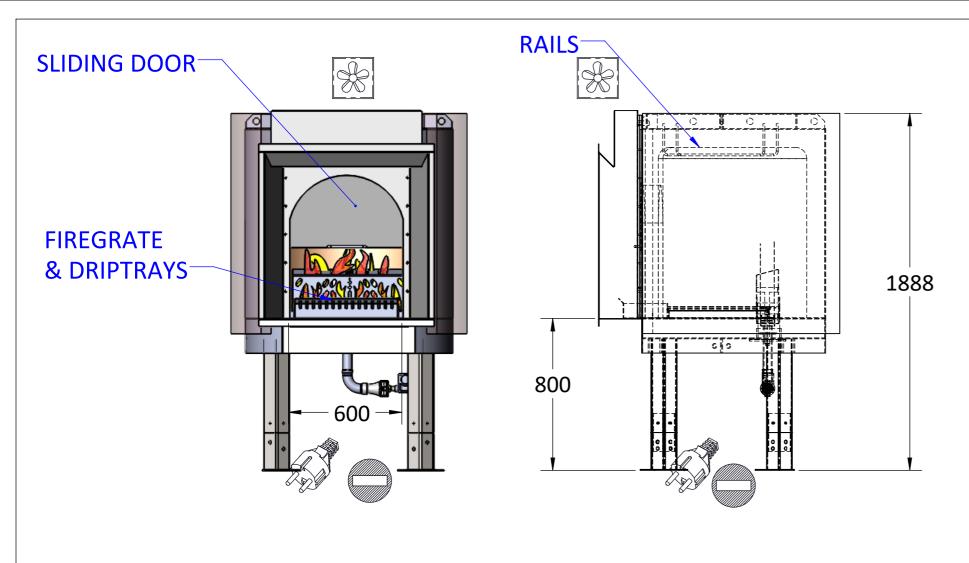

**OVEN MASS:** 

TOP SECTION: ~865kgs. BASE SECTION: ~430kgs.

## **FEATURES:**

**AUTOMATIC GAS SYSTEM DRIP TRAYS & FIREGRATE** 3 x HANGING RAILS (<12 DUCK) **EXHAUST OPTION FOR CANOPY** INTERNAL OVEN LIGHT.



DK900JC


**SPECIFICATION SHEET** 

THE INFORMATION CONTAINED IN THIS DRAWING
IS THE SOLE PROPERTY OF PHOENIX PRIME FOCUS PTY LTD
ANY REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
PHOENIX PRIME FOCUS PTY LTD

Revision > 000	31-08-2017
Revision > 001	Date:
Revision > 002	Date:

ORDER	-
DATE ORDER	-

NOTES:




greg thomson +61 458 772 253


sales@phoenixfocus.com.au


**PO BOX 1258** 

**SPRING HILL** 

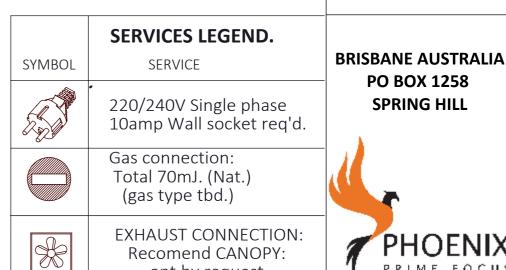

opt.by request.

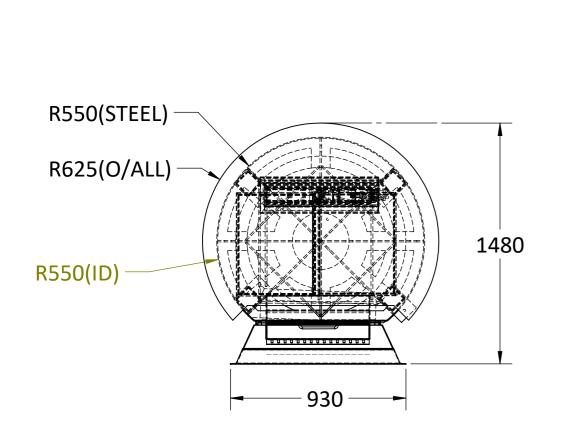

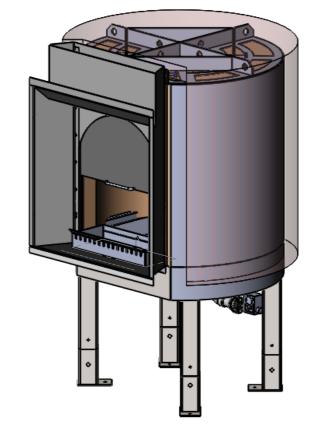

OVERALL DIMENSION INCLUDES 50mm INSULATION +25mm AIR GAP

